


PLAN

NOTES

- 1/ Pipe laid on HS2 bedding
- 2/ This anchor to be used with pipes on greater than 12% grade

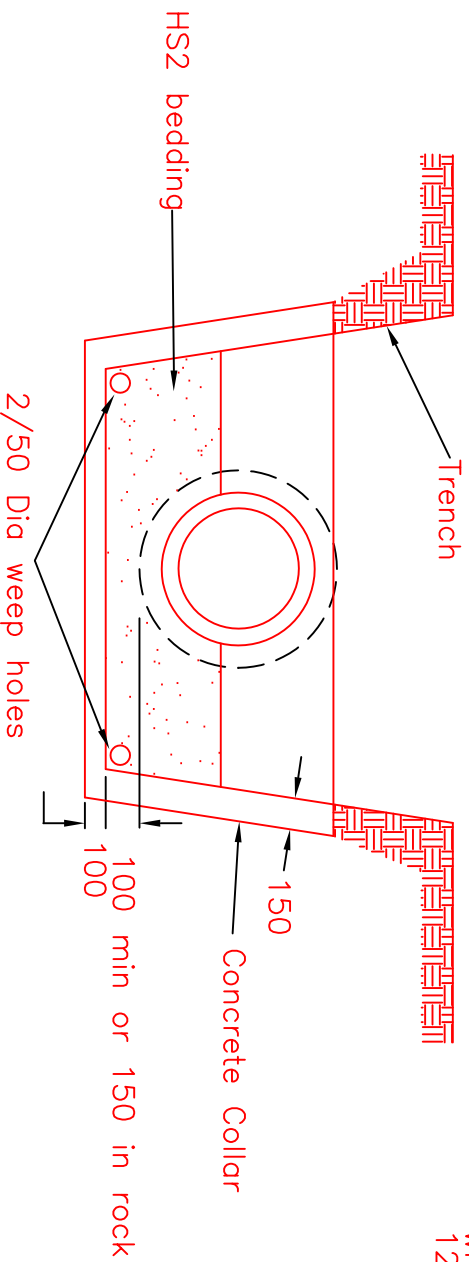

SECTION A - A

NOT TO SCALE

Concrete Collar 300 thick, to be cut into trench 150mm at every second pipe socket

DRAFTING		DESIGN		DEPARTMENT OF INFRASTRUCTURE, ENERGY AND RESOURCES, TASMANIA			
DRWN	P.M.	DATE DESIGNED	AUG 93	R.R.W.	AUG 93	FROM LINK No. / DISTANCE	✓
CHECKED	D. PEARCE	DATE RECOMMENDED/CHECKED	31/8/93	R. JENNI	31/8/93	CONTRACT No.	✓
APPROVED	D. PEARCE	DATE ACCEPTED	31/8/93	W. SCHOE	31/8/93	SHEET No.	✓
AMENDMENTS		CHECKED	DATE	APPROVED	DATE	DRG. No. 3402-2/P34-1	
ANCHOR WIDENED AND WEEP HOLES ADDED			6/03	G.K.R.			
No.							