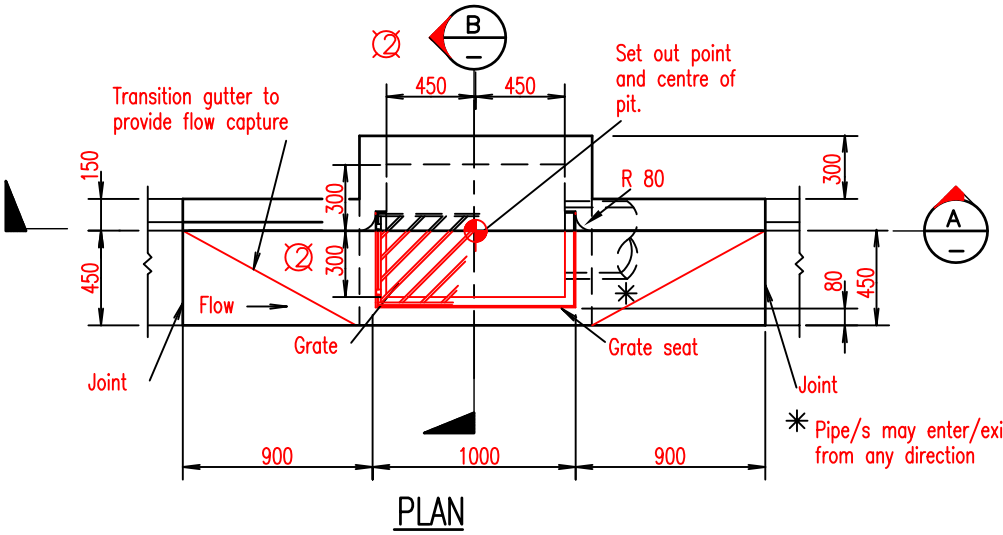

PLAN

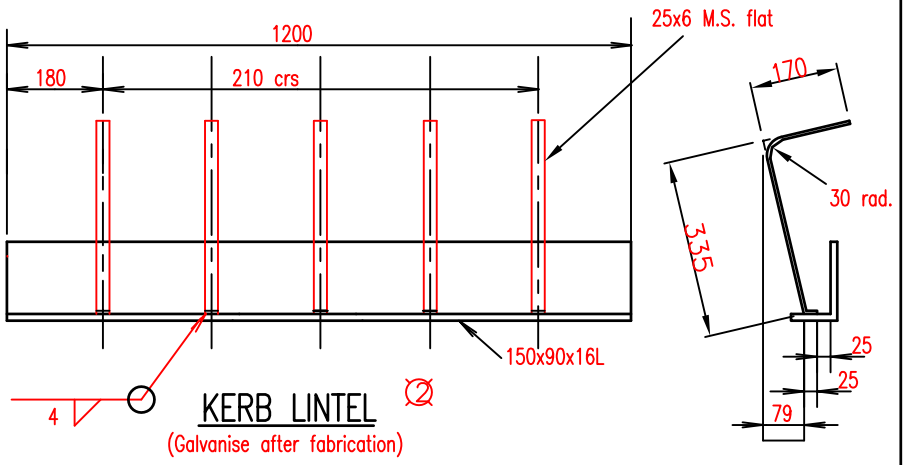

KERB LINTEL
(Galvanise after fabrication)

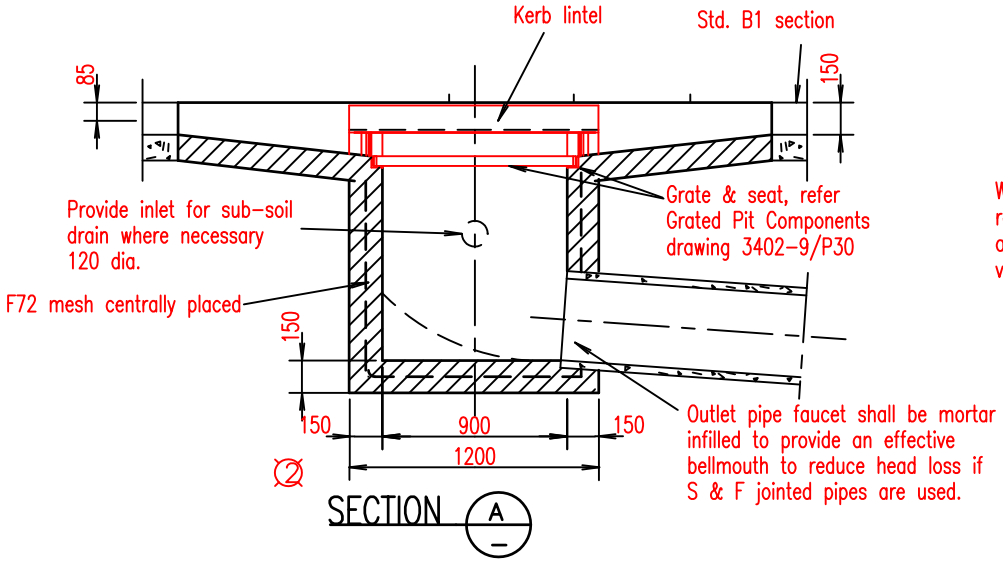

SECTION

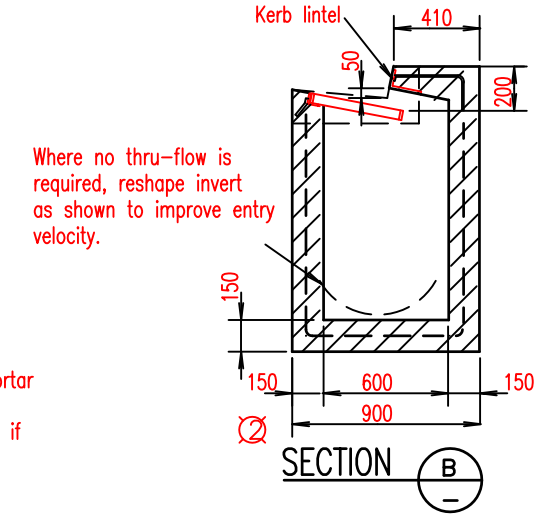

SECTION

NOTES

1. Grade N25 concrete.
2. Pits deeper than 1200 and less than 2400 to be fitted with step irons. Pits deeper than 2400 to be fitted with ladder.
3. All reo. to be lapped 300 and to have 50 min. cover.
4. All external corners to have a. 20 chamfer.
5. Check pit dimensions fit slected grate.

No.	AMENDMENTS	CHECKED	DATE	APPROVED
2	Pit dimensions, lintel & reo amended		31/3/98	JRG

DRAFTING		DESIGN	
DRAWN	DATE	DESIGNED	DATE
S.J.J.	DEC 91	R.R.W.	DEC 91
CHECKED	DATE	RECOMMENDED/CHECKED	DATE
D. PEARCE	DEC 91		
APPROVED	DATE	ACCEPTED	DATE
J. GLUSKIE	DEC 91	R. WILSON	DEC 91

DEPARTMENT OF INFRASTRUCTURE, ENERGY AND RESOURCES, TASMANIA

GRATED PIT
BARRIER KERB B1

FROM LINK No. / DISTANCE	TO LINK No. / DISTANCE
CONTRACT No.	SHEET No.

DRG. No. 3402-9/P27-2