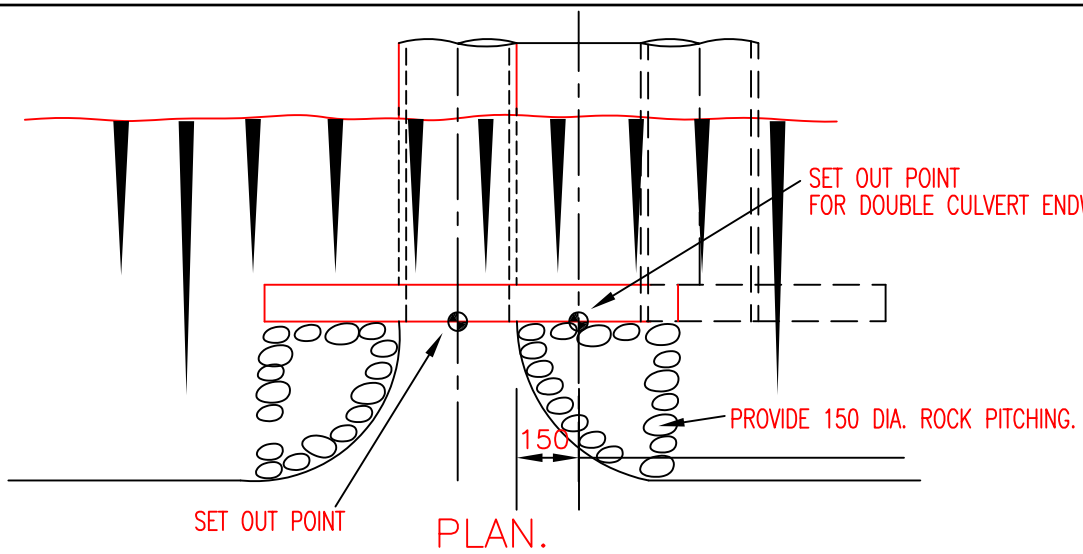

PLAN.

NOTE.
1. For multipipe installation incorporate F81 mesh and maintain minimum dimensions.
2. Grade N25 Concrete.

PIPE DIA (mm)	DIM A (mm)
300	400
375	450
450	500
525	500

Notes
Dimension A is the minimum requirement.

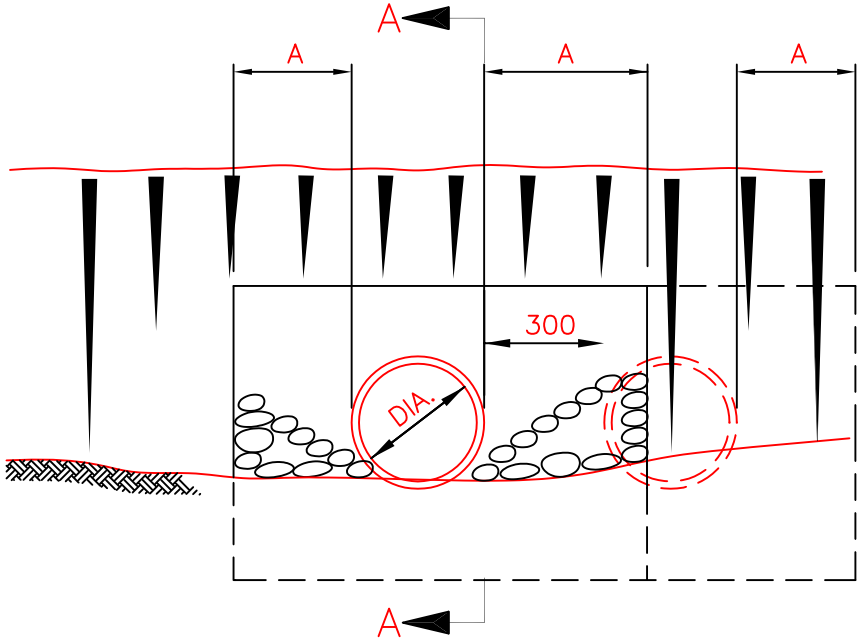

ELEVATION

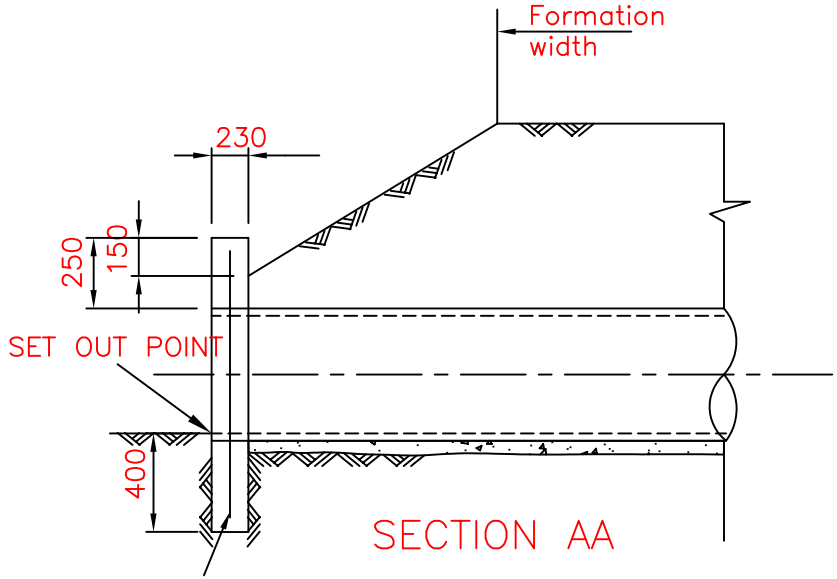

SECTION AA

For multipipe installation incorporate F81 mesh

NOT TO SCALE

No.	AMENDMENTS	CHECKED	DATE	APPROVED
2	ROCKSIZE A AMENDED		7/03	G.K.R.
1	F82 TO F81		15/9/96	G.K.R.

DRAFTING		DESIGN	
DRAWN	DATE	DESIGNED	DATE
PJM	OCT 93	R.R.W.	
CHECKED	DATE	RECOMMENDED/CHECKED	DATE
		E. BRADFORD	11/12/82
APPROVED	DATE	ACCEPTED	DATE
K.R. SAMS	3/12/82	K.R. SAMS	3/12/82

DEPARTMENT OF INFRASTRUCTURE, ENERGY AND RESOURCES, TASMANIA

PLAIN END WALL FOR CULVERTS
(300 – 525mm DIAMETER)

FROM LINK No. / DISTANCE	TO LINK No. / DISTANCE
CONTRACT No.	SHEET No.

DRG. No. 3402–2/P24–2