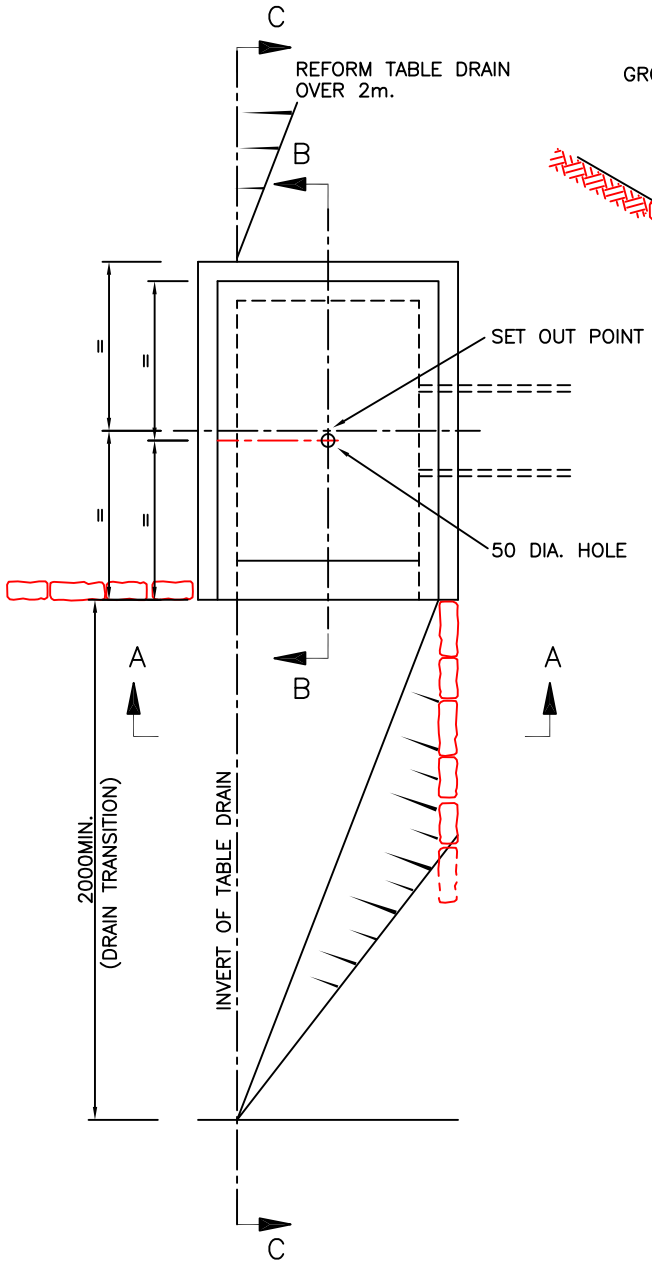

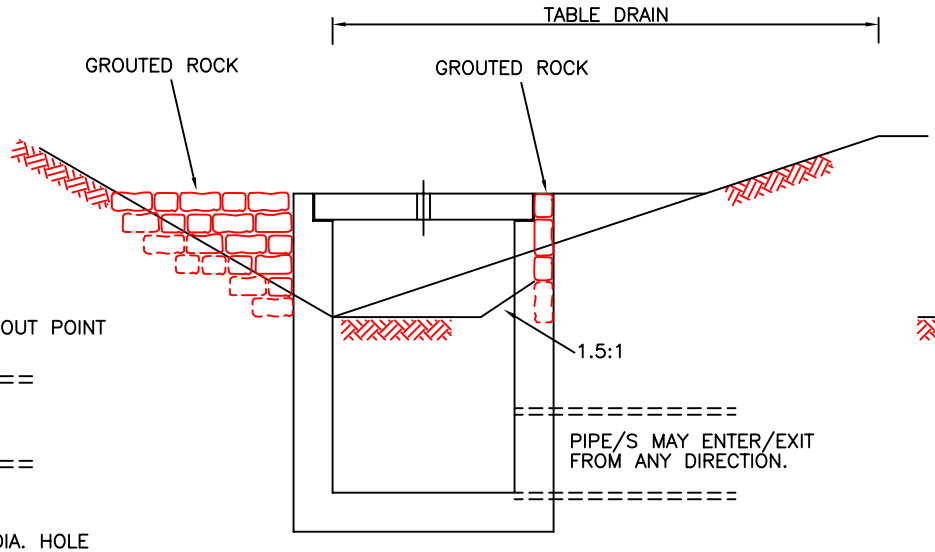

SECTION A – A

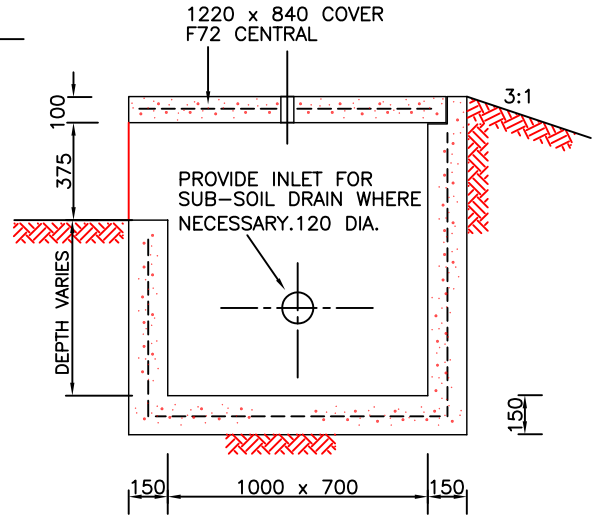

SECTION B – B

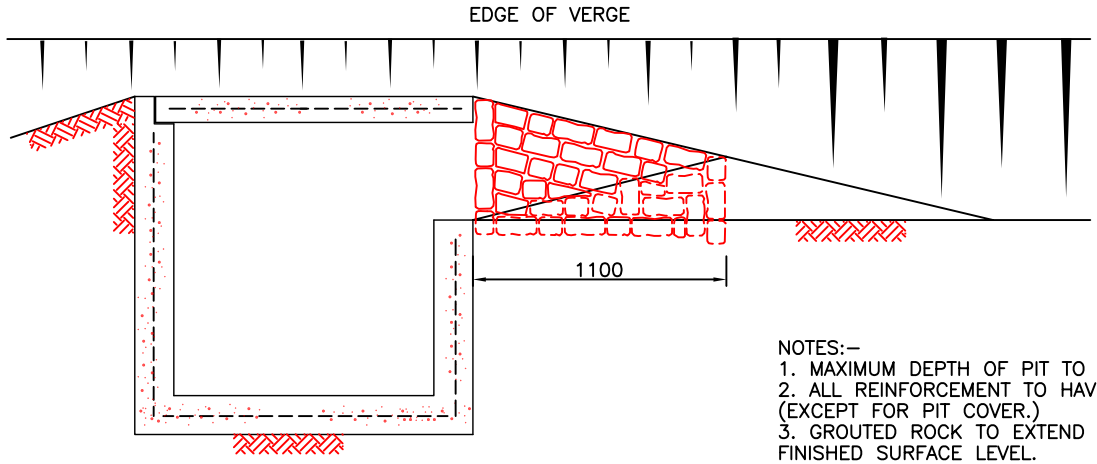

SECTION C – C

NOTES:–
1. MAXIMUM DEPTH OF PIT TO BE 1500.
2. ALL REINFORCEMENT TO HAVE MIN. 50 COVER. (EXCEPT FOR PIT COVER.)
3. GROUTED ROCK TO EXTEND 150 BELOW FINISHED SURFACE LEVEL.
4. ADDITIONAL PIT OPENING MAY BE REQUIRED ON OPPOSITE SIDE IF FLOW IS IN BOTH DIRECTIONS.
5. GRADE N25 CONCRETE.
6. NOT TO BE USED WHEN EXPOSED TO TRAFFIC.

No.	AMENDMENTS	CHECKED	DATE	APPROVED
4	REDRAW AND NOTE 6 ADDED.		7/6/02	G.K.R

DRAFTING		DESIGN	
DRAWN	DATE	DESIGNED	DATE FEB 85
CHECKED	DATE	RECOMMENDED/CHECKED J. ARMSTRONG	DATE 8/5/85
APPROVED	DATE	ACCEPTED W. D. COOMBES	DATE 9/5/85

DEPARTMENT OF INFRASTRUCTURE, ENERGY AND RESOURCES, TASMANIA

CATCH PIT
TABLE DRAIN.

FROM LINK No. / DISTANCE	TO LINK No. / DISTANCE
CONTRACT No.	SHEET No.

DRG. No. 3402–9/P22–4